


LANDLINE 8

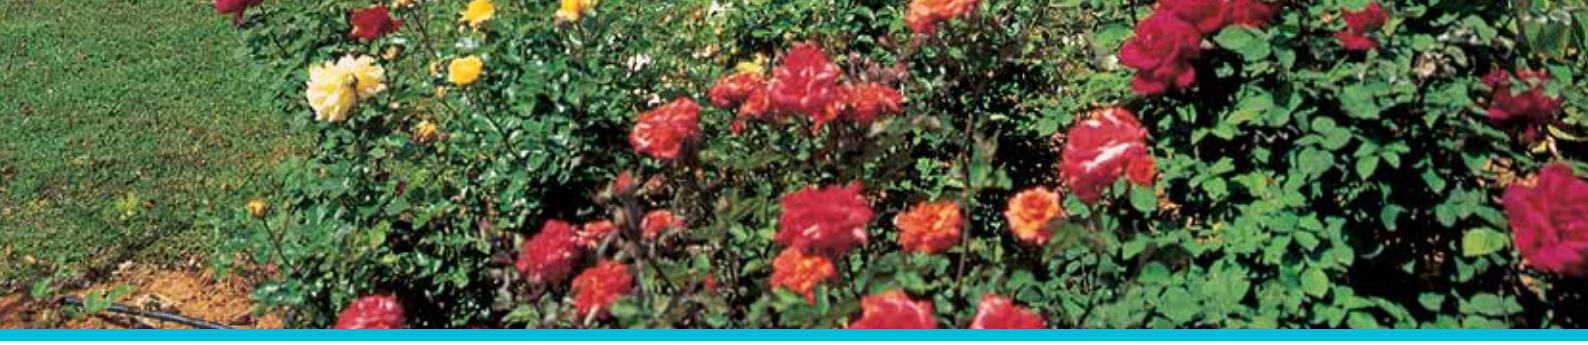

ON-SURFACE TURBONET FLOW

APPLICATIONS

- On-surface installation.
- Shrubs, flower beds and vegetable gardens.
- Short laterals lenght.
- For flat irrigation zones.
- Narrow planting areas.

SPECIFICATIONS

- Dripper flow rate: 2.0 l/h (nominal flow rate at 1.0 bar pressure).
- Maximum operation pressure: 4.0 bar.
- Recommended filtration: 130 micron / 120 mesh.
- Use Landline™ 8 mm fittings.

FEATURES AND BENEFITS

- Large, efficient TurboNet™ flow path.
- Easy installation.
- Tubing flexibility adapts to any shape of planting area.
- UV-resistant dripperline.
- Long lasting reliability and durability.
- Colored brown or dark brown.

DRIPPERS TECHNICAL DATA

NOMINAL FLOW RATE* (L/H)	MAX. WORKING PRESSURE (BAR)	WATER PASSAGES DIMENSIONS WIDTH-DEPTH-LENGTH (MM)	FILTRATION AREA (MM^2)	CONSTANT K	EXPONENT X
2.0	4.0	0.63 x 0.73 x 22	22	0.647	0.49

*Nominal flow rate at 1.0 bar pressure

DRIPPERLINES TECHNICAL DATA

MODEL	INSIDE DIAMETER (MM)	WALL THICKNESS (MM)	OUTSIDE DIAMETER (MM)	MAX. WORKING PRESSURE (BAR)	KD
Landline™ 8	6.30	0.80	7.90	4.0	2.0

NETAFIM AUSTRALIA
P: 1300 307 407
E: au.net.info@netafim.com
W: netafim.com.au

DripNet PC AS MWD Dripperline
September 2017
CP

NETAFIM®
GROW MORE WITH LESS

LANDLINE™ 8

Catalog number **18500** - (any of bellow 6 digits)

FLOW RATE (L/H)	DISTANCE BETWEEN DRIPPER (M)	COIL LENGTH (M)		
		30	50	100
2.00	0.15	002860	002862	002865
	0.20	002880		
	0.30	002920	002919	002922
	0.50	002940		

Missing catalog numbers available upon request

LANDLINE™ 8 (DARK BROWN)

Catalog number **18500** - (any of bellow 6 digits)

FLOW RATE (L/H)	DISTANCE BETWEEN DRIPPER (M)	COIL LENGTH (M)		
		30	50	100
2.00	0.15	003719		
	0.20			
	0.30	003750	003760	
	0.50			

Missing catalog numbers available upon request

DRIPPERLINES PACKAGE DATA

0.80	30	0.15 to 0.50	0.6
	50	0.15 to 0.50	1.0
	100	0.15 to 0.50	2.0

NETAFIM AUSTRALIA

P: 1300 307 407
E: au.net.info@netafim.com
W: netafim.com.au

DripNet PC AS MWD Dripperline
September 2017
CP

NETAFIM®
GROW MORE WITH LESS